


398BV Series

2-Way 90° Instrumentation Valve

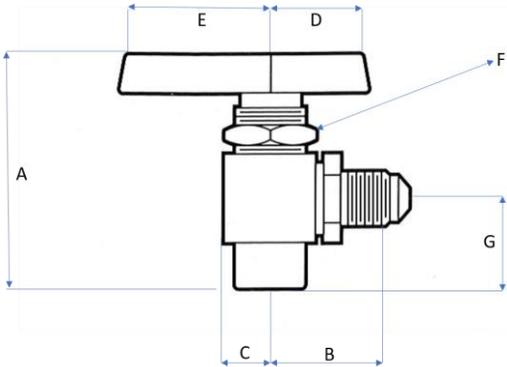

Kantleak™ Instrumentation Ball Valves are designed with double O-ring seal providing over 20,000 cycles without leakage and an exclusive stem seal that never needs tightening. Valves can be panel mounted for instrumentation applications.

- ASTM B-16 Corrosion Resistant Brass Body
 - Chrome plated brass ball
 - Blow-out proof stem
 - Quarter Turn Handle for Instantaneous On-Off Operations
- Pressure Rating:
Up to 1,500 P.S.I.

Part No.	A	B	C	D	E	G	F
398BV4J	2.18	1.05	0.38	0.85	1.15	0.83	0.56
398BV4L	2.18	1.06	0.38	0.85	1.15	0.83	0.56
398BV6J	2.18	1.05	0.38	0.85	1.15	0.83	0.56
3989BV6L	2.18	1.06	0.38	0.85	1.15	0.83	0.56

Part No.	Flare	FNPT
398BV-4J	1/4"	X 1/8"
398BV-4L	1/4"	X 1/4"
398BV-6J	3/8"	X 1/8"
398BV-6L	3/8"	X 1/4"
398BVF4XJ-1		